

Quadra Plus Specification Sheet



Featuring a separate mixer tap complete with its own hot water supply, the Quadra Plus functions as your hot water service and still provides boiling and chilled drinking water

Lowest Energy Consumption

Billi's unique energy reclaim systems recovers waste heat energy generated by chilling water and reuses the energy to preheat the boiling water, thereby saving energy. By considering composition and construction of each component to every unit Billi achieves Australia's lowest carbon foot print. The Standby mode also conserves power by powering down after 2 hours of non use.

Eliminates the need for an additional hot water service

The Billi Quadra Plus incorporates its own hot water service all in the one small underbench unit. Maintaining the small underbench dimensions the Quadra Plus is up to half the size of comparative products.

Boiling water reserve

The Quadra Plus units have a boiling water reserve to ensure you will have boiling water after the hot water supply through the mixer tap is fully drawn.

Water cooled or air cooled options

Billi are the only manufacturer to offer both water-cooled and air-cooled options. Our Water-cooled systems are more energy efficient than our air cooled systems. Billi's heat exchange technology ensures water usage is absolutely minimal. Billi's air cooled option generates far less heat than traditional air cooled systems.

Safety first

The Billi Eco's SplashFree boiling water delivery electronically varies the water flow, slowing momentarily to eliminate splashing as the water first enters the cup. All Billi dispensers are supplied standard with a safety switch.

No cupboard ventilation required on water cooled models

The Billi Quadra Plus water cooled units do not require cupboard ventilation or a cooling fan

Choice of Styles

Billi Eco & Quadra units are available with a choice of XL Levered, XT Touch & XR Remote dispenser styles and Paddle, Gooseneck or Square Mixer taps in a range of finish options including Chrome, Matte Black, Matte White & Rose Gold.

Australian designed and manufactured.



XL Levered with Paddle Mixer in Chrome



Gooseneck Mixer in Chrome

* To order a square mixer change Product code on page 2 from LP to LG



Square Mixer in Chrome

* To order a square mixer change Product code on page 2 from LP to LS

Quadra Plus Specification Sheet

Specifications and guide to standard model selection

Product Code	Model	Suggested no. of people	50° hot water delivery litres per Hr	Boiling water delivery cups per Hr	Chilled water delivery cups per Hr	Current draw (amps)	Height (mm)	Width (mm)	Depth (mm)	Depth* Air-cooled (mm)
904025LPCH	Quadra Plus 5 XL & Paddle Mixer Chrome	Up to 25	40	120	175	10	340	315	465	510
904065LPCH	Quadra Plus 9 XL & Paddle Mixer Chrome	Up to 60	60	180	175	10	340	315	465	510
904105LPCH	Quadra Plus 15 XL & Paddle Mixer Chrome	Up to 100	60	250	175	15	340	315	465	510

Please note: All Models come in a range of dispenser options and finishes. The codes shown on this table are for XL Dispenser in Chrome only. You can view the options and Product Codes here: http://billi.com.au/wp-content/uploads/2015/08/Billi-Product-Selection-Guide_0217.pdf

Power supply

The Quadra Plus 5 and 9 require a standard 10 Amp power outlet, while the Quadra Plus 15 model requires a 15 Amp AU power outlet. All models are supplied with a 1 metre flex cord and plug.

Water supply

Two 15mm (1/2") stop-taps (not supplied) with male threads—one cold water supply to Quadra Plus and one cold water supply to Sink Mixer Tap—should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa.

Filtration

Billi's premium filters ensure that health threatening pollutants and impurities such as sediment, chemicals, heavy metals, chlorine and pesticides are safely removed leaving you with refreshingly clean drinking water. All Billi cartridges are certified by NSF International.

Filter changes are made simple by our swing-change system and replacement cartridges are available online at www.billi.com.au. Optional sub micron and premium submicron filters are available.

Certifications

Every Billi drinking water appliance is manufactured under a certified quality control system. The Billi Quadra Plus has been tested and complies with all required standards including: Watermark Licence Number 21525; certified to; AS3498 and AS/NZS4020; ISO 9001; Section J6 of the BCA; Certificate Number QEC 11627.




Warranty

All components of the Billi units are covered by a 24 month warranty. Filter cartridges are a consumable and are not covered by warranty, as water conditions and usage vary.

Technical Advice

Contact Billi Pty Ltd on 1800 812 321

Installation layout

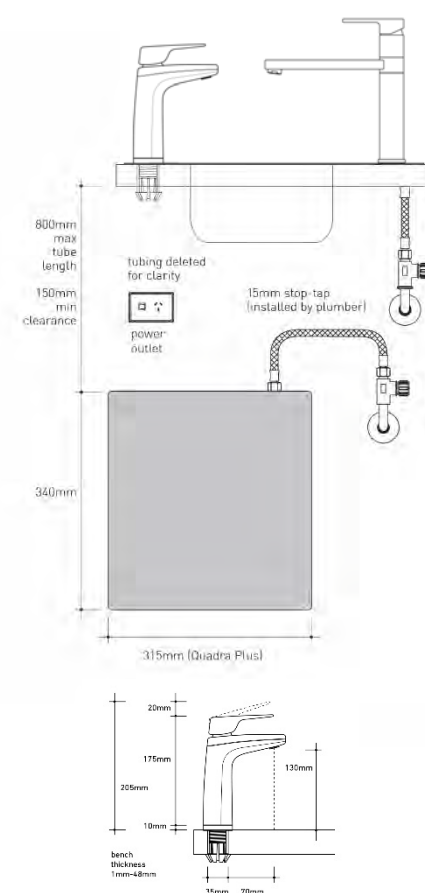

XL Levered tap dimensions

1 cup = 170ml. Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. Consideration may be needed for usage patterns and draw-off methods.

*When specifying air-cooled models, simply change the 904 to 905 and add AC after the description.